


Viktor chain & Matras chain



VICTOR CHAIN (1)

- ✓ Electrolytically galvanised chain for the installation of pipes, etc.
- ✓ Supplied in coils of 30 meters
- ✓ Thicker chains (wire number 40: 3.8 mm / 45: 4.2 mm / 50: 4.5 mm) are available on request
- ✓ The chain is not suitable for lifting purposes

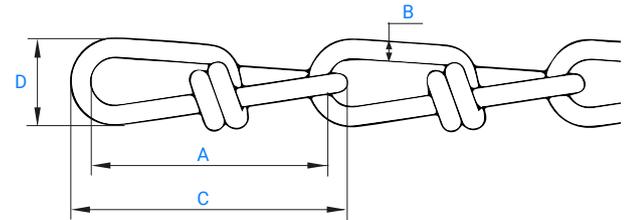

Technical Data

Wire number (A)	Link thickness (B) (mm)	Link length (C) (mm)	Link width (D) (mm)	Weight / 100 m (kg)	Max. suspension weight (kg)
22	2	28	9	8	100
27	2,5	35	11	14	150
30	2,8	39	12,5	19	190
35	3,4	44	15	25	245

Selection table for S-Hooks

Wire number	S-Hook					
	30	40	50	60	70	80
22	yes	yes	yes	no	no	no
27	no	yes	yes	yes	no	no
30	no	no	yes	yes	yes	no
35	no	no	no	no	yes	yes

yes = is fitting

no = does not fit or is too small compared to the chain

MATRAS CHAIN (2)

- ✓ Electrolytically galvanised chain for the installation of pipes, etc.
- ✓ Supplied in sacks of 25 kg with +/- 250 meters of chain
- ✓ Wire number 15 and thickness 2.0 mm